

# VOLUMETRIC FLOW METER

(ANALOG)



**NTR/05** (FOR STATIC USE) & **NTR/06** (FOR MOBILE USE)

## FEATURES :

- POSITIVE DISPLACEMENT METER
- ACCURACY : **±0.1%**
- FLOWRATE : UPTO 90 LPM
- REPEATABILITY : 100%
- TOTALIZER : 8 DIGIT (99,99,999.9 NON REVERSIBLE)
- EASY INSTALLATION & MAINTENANCE
- PREVENT WASTAGE TO HIGH EXTENT
- EASY FOR FIELD CALIBRATION
- WORKABLE FOR LONG TIME
- FUNCTIONS IN STATIC OR MOBILE CONDITIONS
- CAN REACH CUSTOMERS' DOOR STEPS



SUITABLE FOR LIQUIDS SPECIALLY DIESEL, LDO, FURNACE OIL, AVIATION FUEL, KEROSENE, BIO-DIESEL, MINERAL OILS, SOLVENTS, THINNER AND NON-CORROSIVE LIQUIDS.

PROMPT MAINTENANCE SUPPORT

CERTIFICATION : LEGAL METROLOGY GOVT. OF INDIA, INDIA DESIGN MARK



**VOLUMETRIC FLOW METER (4 DIGIT)**

**AVAILABLE VARIANTS :**

NTR/05 : FOR STATIC USE & NTR/06 : FOR MOBILE USE



**VOLUMETRIC FLOW METER (5 DIGIT)**

**AVAILABLE VARIANTS :**

NTR/05 : FOR STATIC USE & NTR/06 : FOR MOBILE USE



◀ **RESET KNOB**

◀ **OUTLET**

◀ **INLET**

**TOTALIZER : 8 DIGIT  
(99,99,999.9 NON REVERSIBLE)**



SCAN OR TAP THE QR  
FOR MORE DETAILS

# PRODUCT SPECIFICATION

NAME OF THE PRODUCT : VOLUMETRIC FLOW METER (4DIGIT)(5DIGIT)



|                         |  |
|-------------------------|--|
| MODEL NO :              | NTR/05 (STATIC) , NTR/06 (MOBILE)                |
| AVAILABLE MODELS :      | MECHANICAL                                       |
| DIMENSIONS :            | 24.1cm x 26cm x 42cm                             |
| WEIGHT :                | 15 KG( APPROX )                                  |
| ACCURACY :              | +/- 0.1%   |
| FLOW RATE :             | 5 - 90 LPM                                       |
| TYPE :                  | POSITIVE DISPLACEMENT METER                      |
| BODY MATERIAL :         | CRCA SHEET                                       |
| WORKING PRESSURE :      | 28 PSI (MAXIMUM)                                 |
| REPEATABILITY :         | 100%   |
| DISPLAY :               | MECHANICAL                                       |
| TOTALIZER :             | MECHANICAL (99,99,999.9) (NON REVERSIBLE)        |
| OPERATING TEMPERATURE : | 0 – 60 DEGREE CELSIUS                            |
| CONNECTIONS :           | 01 INCH (25MM) BSP AT BOTH ENDS (INLET & OUTLET) |



SCAN THIS QR TO WATCH PRODUCT VIDEO

OR

TAP THIS BUTTON

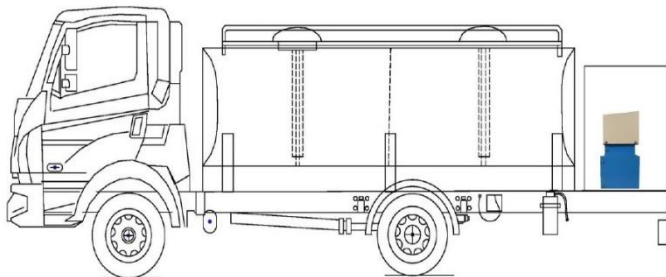

TAP HERE FOR



CONTACT



LOCATION

TAP THIS BUTTON TO WATCH INSTALLATION VIDEO



## NEOGI TECHNOLOGIES AND RESEARCH PRIVATE LIMITED

(C.I.N. : U93000WB2013PTC192588)

**AN IMS Certified Organisation**

Regd. off: 2, Kumarpara Road, P.O. : Rajpur, Kolkata - 700 149, West Bengal, India

Phone : +91 33 2477 8866 / 4335 | Mob : +91 98307 05545

E-mail : support@ntrindia.co.in | Visit us : www.ntrindia.co.in

